

FLEXI-BAFFLES

DATA SHEET 2020

Culvert baffles are designed to assist with upstream fish passage by altering the flow of water through culverts & providing areas for fish to rest. Baffles can be fitted prior to new culvert installation, or retro-fitted to existing structures.

COPYRIGHT © - All Rights Reserved

Pat.Pend.



Flexi-Baffle




PRODUCT SPECIFICATIONS

- **Length:** Modified to fit any size requirement
- **Nominal height:** 4inches/100mm or 6inches/150mm.
- **Material:** Flexible polymer (recycled/virgin mix)
- 150mm profile - EPDM Vulcanizate working temperature range -59°C → +100°C
- 100mm profile - Polyethylene
- **Warranty:** 20 years material only
- **End options:** Straight or bevelled

PRODUCT ATTRIBUTES

- Light weight
- Reduce velocity
- Increase depth
- Interrupt laminar flow
- Extend range of flow characteristics
- UV Stable - No granulation
- Retain stream bed material
- Create high and low flow passage
- Easy installation/ATS can provide if required

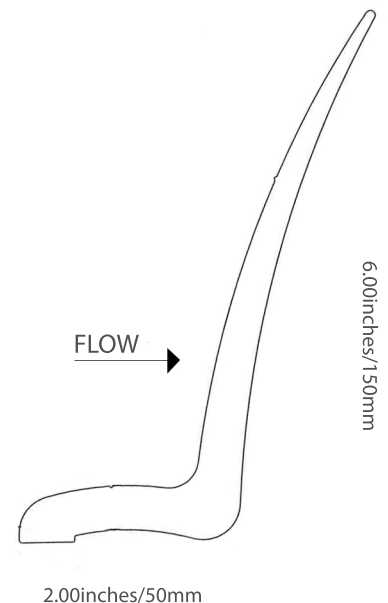

"Every day a little bit better"